

300_

Open your space



doorson | *axis*

300_



Highly efficient and attractively designed automatic sliding doors product line 300 for exterior and interior. They provide a variety of architectural possibilities when designing an office, hotel, restaurant, hospital or any other place. The only limit is your imagination.

The slim, minimalistic 10 cm drive is less intrusive and gives the door a modern look. The built-in sensor ensures a comfortable and safe entrance.

The door is operated by our innovative drive controller with our very own door switches that offer various functions. Since our automatic sliding doors consume less than 0.5 W of electricity when they are in sleep mode, you don't only cut your

costs, but also contribute to a cleaner environment by using our energy-saving doors.

Product line 300 increases the security level and enables a safe and easy emergency exit for everyone. Product line 300 fulfills the essential requirements in the applicable CE directives and is available with the redundant function, which allows it to be installed on emergency exits and escape routes, according to the EN 16005 and EN 16361 standards.





10 cm
drive height

built-in
sensor
for pedestrian safety

< 0.5 W
power consumption

touchless
door opening



Energy consumption
(kWh)

The door's electric energy consumption in CLOSED or OPEN mode drops down to **0.4 W**.

70% **Saving energy & reducing CO₂**



300 thales | frameless sliding door

Virtually invisible

Technical features:

- 1 leaf: clear opening width 800 - 2000 mm
- 2 leaves: clear opening width 800 - 3000 mm
- max. clear opening height 3000 mm






300 | standard sliding door

The universal choice

Technical features:

- 1 leaf: clear opening width 800 - 2000 mm
- 2 leaves: clear opening width 800 - 3000 mm
- max. clear opening height 3000 mm

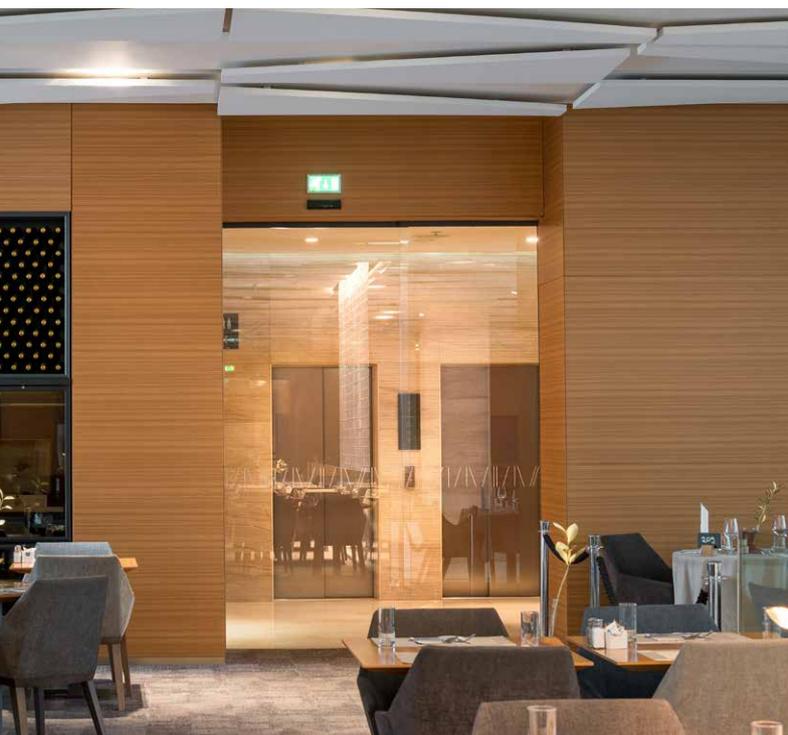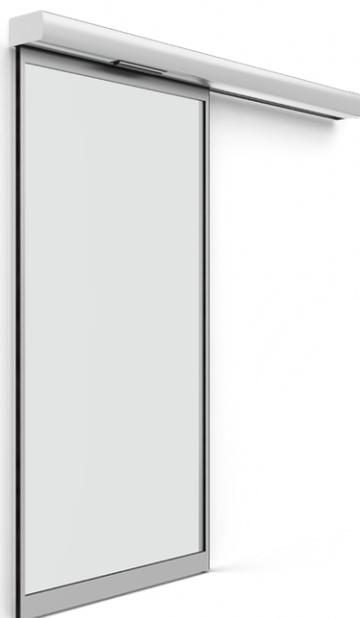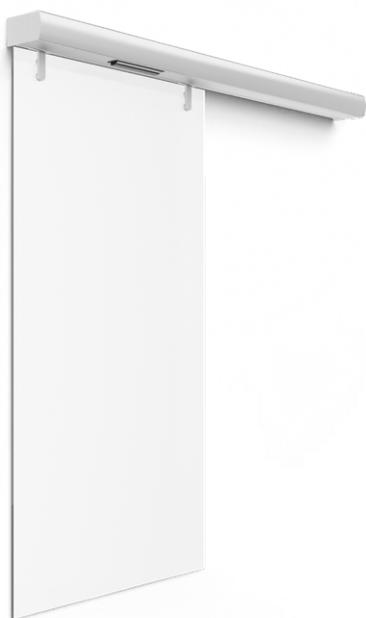

300 T | telescopic sliding door

Open wider

Technical features:

One sided: clear opening width 900 - 3000 mm
Two sided: clear opening width 1600 - 3000 mm
max. clear opening height 3000 mm





300 A | break-out sliding door

Safe open

Technical features:

1 leaf: clear opening width 800 - 1200 mm
2 leaves: clear opening width 800 - 2200 mm
max. clear opening height 3000 mm

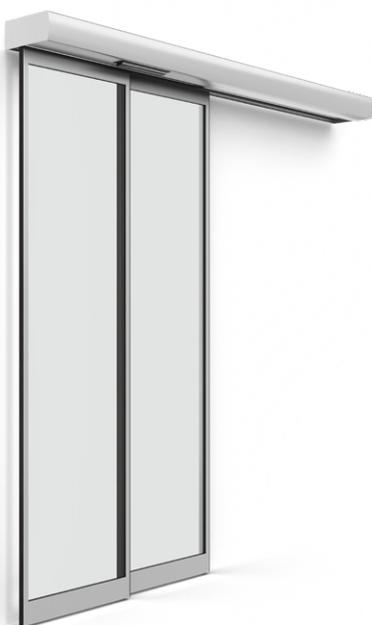

300 P | prismatic sliding door

Inspiration on the corner

Technical features:

2 leaves: clear opening width 800 - 3000 mm
max. clear opening height 3000 mm




300 C | curved sliding door

First impression


Technical features:

drive height: adaptable (min. 260 mm)
radius min. $r = 1000$ mm, max. $r =$ adaptable
max. clear opening height 2500 mm

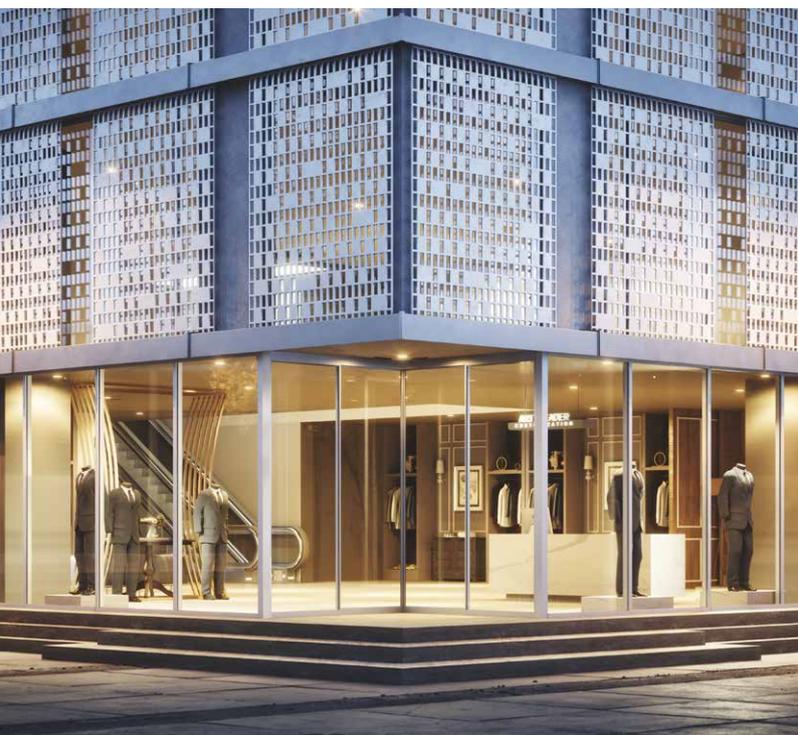


Customize your door

Make it right, make it simple

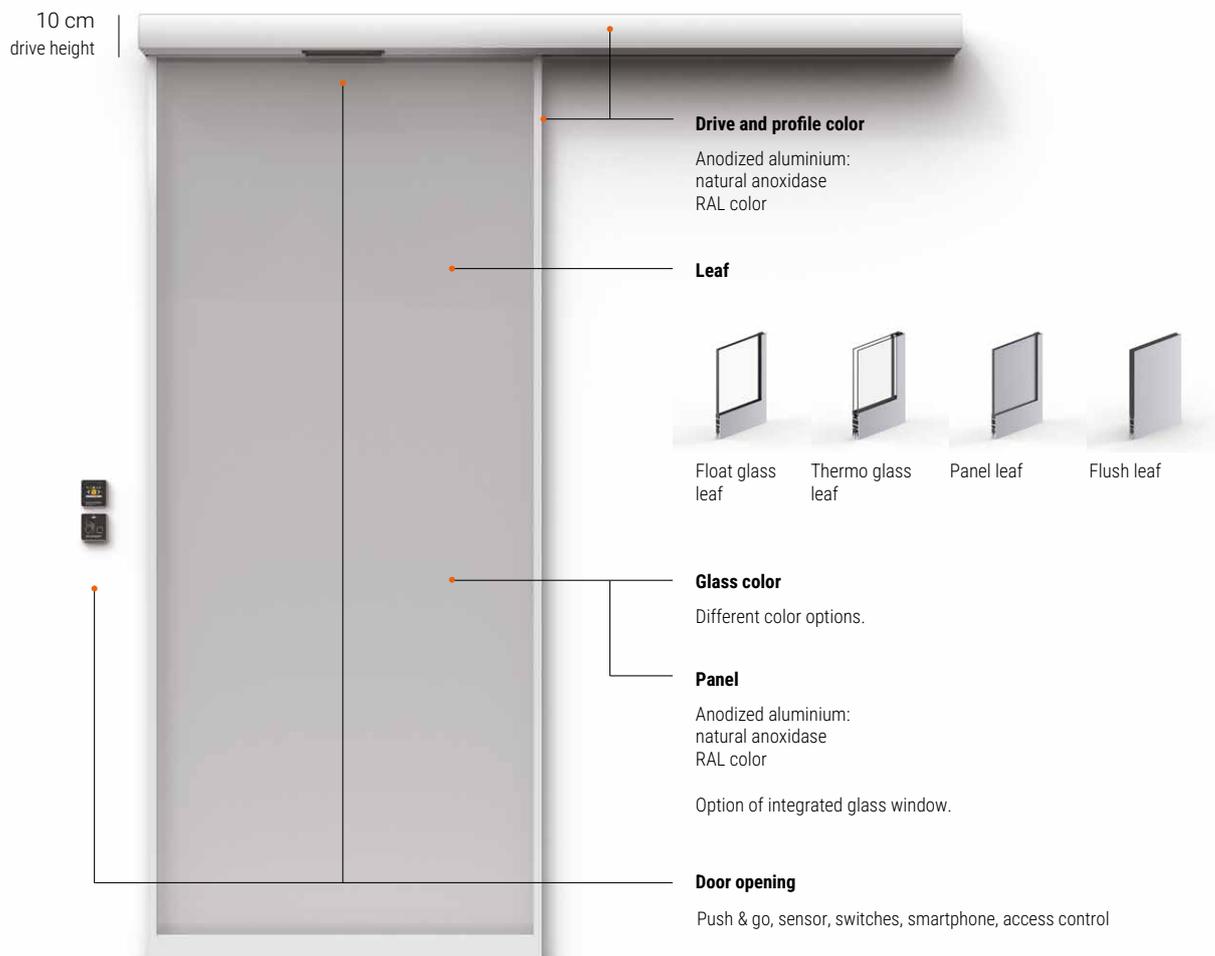

Technical data | 300 product line

USE	interior/exterior
OPENING - CLOSING SPEED	0.3 - 0.7 m/s (adjustable)
OPENING TIME	0 - 15 s (adjustable)
POWER CONSUMPTION	max 300 W/230 V; < 0.5W power consumption in sleeping mode
LEAF	frameless leaf, float glass leaf, thermo glass cold frame leaf, panel leaf, flush leaf
INSTALLATION	wall installation, between the wall, under the ceiling, with top screen, in the wall
PROFILE COLOR	anodized aluminium: natural anoxidase, RAL color
GLASS COLOR	different color options
DOOR OPENING	sensor, door switches, smartphone, access control
FUNCTIONALITY	a variety of adjustable functions and parameters; switching between different door regimes: OPEN, LOCK, STOP, AUTO-SUMMER, AUTO-WINTER, ONE WAY-SUMMER, ONE WAY-WINTER; warning diagnosis by COM 20
ENERGY SAVING	✓
EMERGENCY EXIT	✓
STANDARDS:	EN 16005, EN 16361

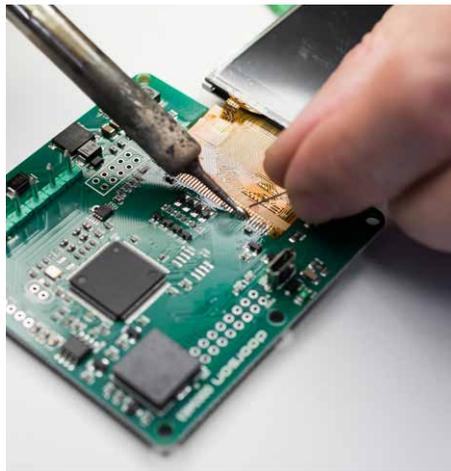

EU
made in Europe

axis
"Making an Entrance"

Axis Entrance Systems Ltd
Unit 6, Queens Park Industrial Estate
Studland Road, Northampton NN2 6NA

+44 01604 212 500
sales@axisentrances.com
www.axisentrances.com